

PW16A...


Single point load cells

Special features

- Maximum capacities: 30 kg ... 660 kg
- Aluminum
- High ratio of minimum verification interval Y
- Off-center load compensation
- Complies with EMC directives
- Explosion protection and other options also available



Dimensions in mm (1 mm = 0.03937 inches)

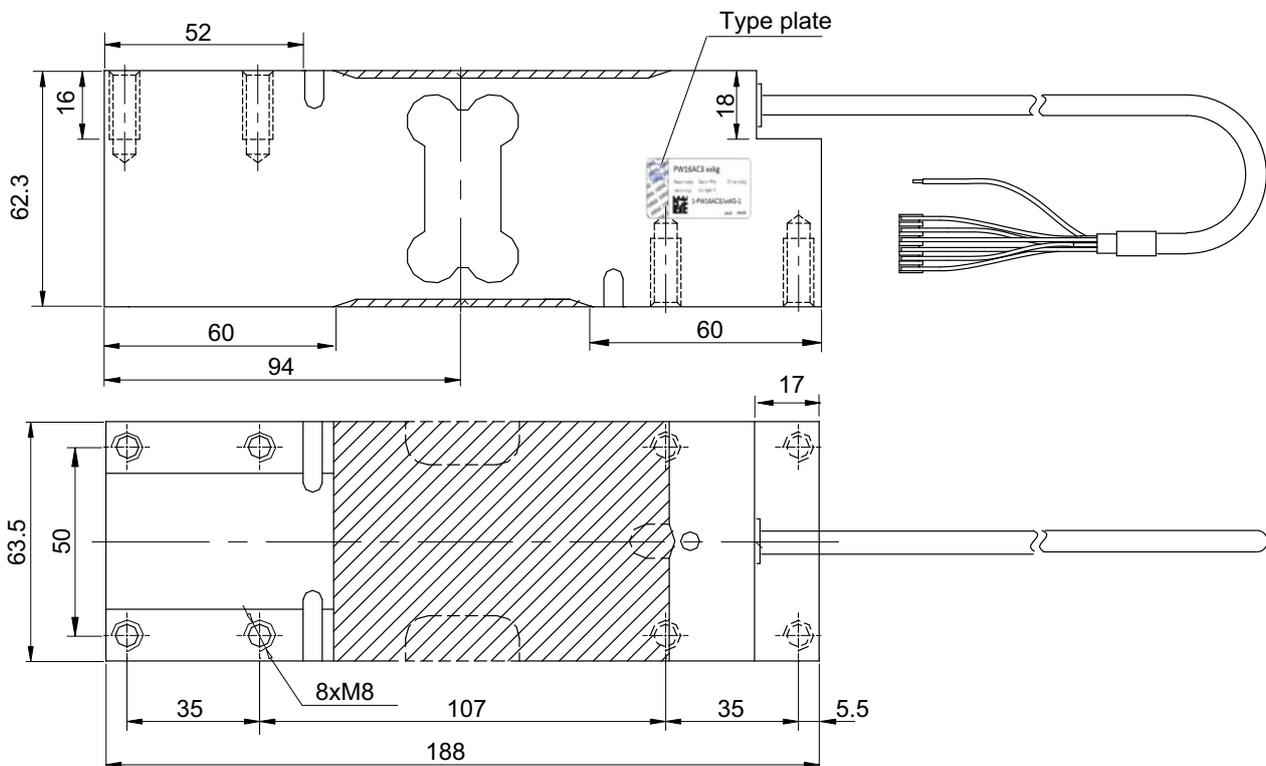

Specifications

Type			PW16A...									
Accuracy class ¹⁾			C3 Multi Range (MR)									
Number of load cell verification intervals	n_{LC}		3000									
Maximum capacity	E_{max}	kg	30	50	75	100	150	200	250	300	500	660
Minimum load cell verification interval	v_{min}	g	2	5	5	10	10	20	20	20	50	50
Temperature coefficient of zero signal	TC_0	% of $C_n / 10\text{ K}$	± 0.0093	± 0.0140	± 0.0093	± 0.0140	± 0.0093	± 0.0140	± 0.0112	± 0.0093	± 0.0140	± 0.0106
Ratio of minimum verification interval Y	Y		15,000	10,000	15,000	10,000	15,000	10,000	12,500	15,000	10,000	13,200
Maximum platform size		mm	600 x 600									
Nominal sensitivity	C_n	mV/V	2.0 ± 0.2									
Zero signal			0 ± 0.1									
Temperature coefficient of sensitivity ²⁾	TC_S	% of $C_n / 10\text{ K}$	± 0.0175									
Temperature range +20 ... +40 °C			± 0.0117									
-10 ... +20 °C												
Relative reversibility error ²⁾	d_{hy}	% of C_n	± 0.0166									
Non-linearity ²⁾	d_{lin}		± 0.0166									
Minimum dead load output return	DR		± 0.0166									
Off-center load error ³⁾			± 0.0233									
Input resistance	R_{LC}	Ω	300 ... 500									
Output resistance	R_0		300 ... 500									
Reference excitation voltage	U_{ref}	V	5									
Nominal (rated) range of the excitation voltage	B_U		1 ... 12									
Max. excitation voltage			15									
Insulation resistance at 100 V _{DC}	R_{is}	G Ω	> 2									
Nominal (rated) range of the ambient temperature	B_T	°C	-10 ... +40									
Service temp. range	B_{tu}		-10 ... +50									
Storage temp. range	B_{tl}		-25 ... +70									
Limit load	E_L	% of E_{max}	150									
Limit lateral loading, static	E_{lq}		300									
Breaking load	E_d		300									
Rated displacement at E_{max} , approx.	s_{nom}	mm	< 0.5									
Weight, approx.	m	kg	1.8									
Degree of protection ⁴⁾			IP67									
Material:			Aluminum									
Measuring body			Silicone rubber									
Covering agent			PVC									
Cable sheath												

1) As per OIMLR60, with $P_{LC} = 0.7$


2) If the values for non-linearity (d_{lin}), relative reversibility error (d_{hy}) and temperature coefficient of sensitivity (TC_C) are added together, they are within the cumulated error limit specified in OIML R60.

3) Off-center load deviation per OIML R76.

4) EN 60 529 (IEC 529)

Cable assignment

6-wire cable connection (available cable lengths: 1.5 m; 3 m; 6 m; 12 m)

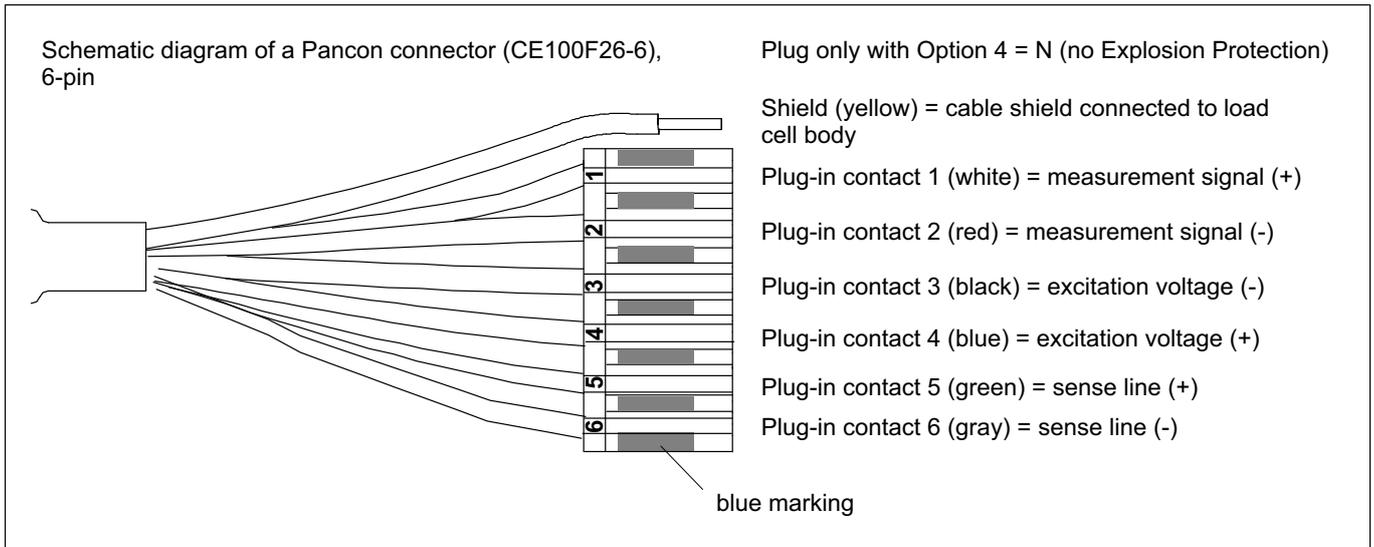


Mounting and load application

The load cells are attached at the mounting holes, the load is applied at the other end. The recommended screws and tightening torques can be found in the table below:

Maximum capacities	Thread	Min. property class	Tightening torque ¹⁾
30...500 kg	M8	10.9	32 N·m
660 kg	M8	12.9	39 N·m

¹⁾ Recommended value for the specified property class. Please comply with the screw manufacturer's instructions with regard to screw dimensions

Load must not be applied to the side where the cable connection is located, as this would cause a force shunt.

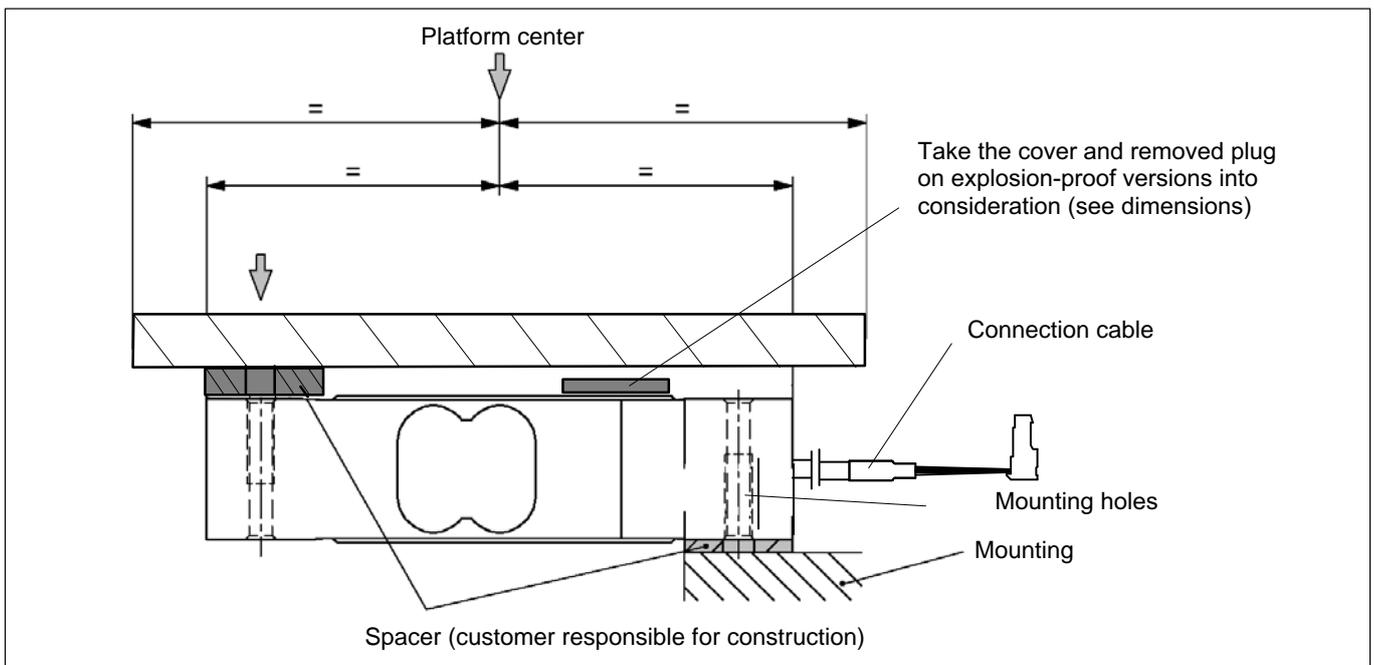

Product numbers

PW16A... (aluminum)

Type	PW16A
Accuracy class	C3-MR (OIML) (Multi Range)
Comments	Cable length 3 m (6-wire)

Maximum capacity	Ordering number	Maximum capacity	Ordering number
30 kg	1-PW16AC3/30KG-1	200 kg	1-PW16AC3/200KG-1
50 kg	1-PW16AC3/50KG-1	250 kg	1-PW16AC3/250KG-1
75 kg	1-PW16AC3/75KG-1	300 kg	1-PW16AC3/300KG-1
100 kg	1-PW16AC3/100KG-1	500 kg	1-PW16AC3/500KG-1
150 kg	1-PW16AC3/150KG-1	660 kg	1-PW16AC3/660KG-1

K-PW16A... (aluminum), optional version

Ordering number	
K-PW16A	

Code	Option 1: Mechanical design
N	-

Code	Option 2: Accuracy class
MR	C3-MR (OIML) (Multi Range)

Code	Option 3: Maximum capacity
30	30 kg
50	50 kg
75	75 kg
100	100 kg
150	150 kg
200	200 kg
250	250 kg
300	300 kg
500	500 kg
660	660 kg

Code	Option 4: Explosion protection
N	No explosion protection
A11/21	IECEx+ATEX Zone 1/21+FM, intrinsically safe II 2G Ex ia IIC T6/T4 Gb/II2 D Ex ia IIIC T125°C Db*
A12/22	IECEx+ATEX Zone 2/22, not intrinsically safe II 3G Ex ec IIC T6/T4 Gc/II 3D Ex tc IIIC T125°C Dc*

Code	Option 5: Cable length
1.5	1.5 m
3	3 m (standard)
6	6 m
12	12 m

Code	Option 6: Other
N	Without
A	2mV/V $\pm 0.1\%$ / 410 $\Omega \pm 0.3 \Omega$ [only with option 4 = N] (adjusted output, suitable for parallel connection)

K-PW16A	-	N	-	-	-	-	-	-	-	-
---------	---	---	---	---	---	---	---	---	---	---

* Including EC-Type Examination Certificate/Certificate of Conformity BVS 13 ATEX X 108 X/IECEx BVS 13.0109 X

Not all codes can be combined with one another. Take note of the conditions in square brackets!

Subject to modifications.
All product descriptions are for general information only. They are not to be understood as a guarantee of quality or durability.

托驰 (上海) 工业传感器有限公司
上海市嘉定区华江路348号1号楼707室
电话: +86 021 51069888
传真: +86 021 51069009
邮箱: zhang@yanatoo.com
网址: www.sensor-hbm.com

measure and predict with confidence

