

## **DATA SHEET**


# T210 Torque transducers

## **SPECIAL FEATURES**

- Linearity deviation, including hysteresis ≤ ±0.05%
- Nominal (rated) torque of 0.5 to 200 Nm
- High speeds of up to 30,000 rpm
- Rotational speed measurement with 512 pulses/ revolution
- Output signals ±10 V and 10 kHz ±5 kHz
- Non-contacting transmission of measured values
- · Cylindrical shaft ends for friction fits



## **INSTALLATION EXAMPLE WITH BELLOWS COUPLINGS**

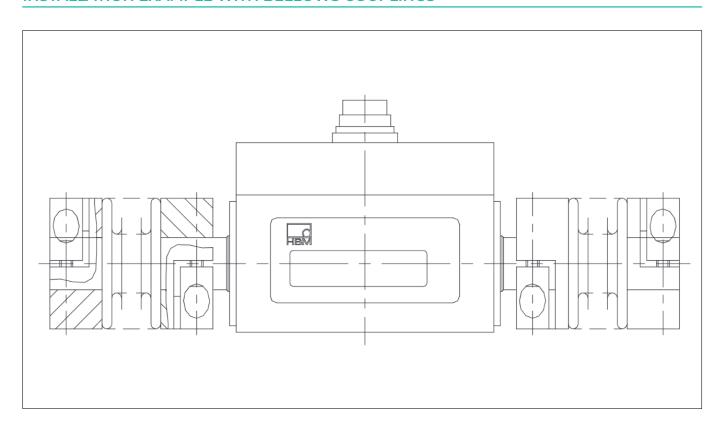

# **SPECIFICATIONS**

Accuracy class  Size  BG1  BG2  BG3  Nominal (rated) torque M <sub>nom</sub> Nm  0.5  1  2  5  10  20  50  100  Maximum speed n <sub>max</sub> rpm  30,000  20,000  14,00  Torque measuring system  Linearity deviation including hysteresis relating to the rated output (nominal)  Relative standard deviation of repeatability, as per DIN 1319 relating to the variation of the output signal  Temperature effect per 10 K in the nominal (rated) tem-	200
Nominal (rated) torque $M_{nom}$ Nm 0.5 1 2 5 10 20 50 100 Maximum speed $n_{max}$ rpm 30,000 20,000 14,00 Torque measuring system  Linearity deviation including hysteresis relating to the rated output (nominal) % $\pm 0.05$ Relative standard deviation of repeatability, as per DIN 1319 relating to the variation of the output signal	
Maximum speed $n_{max}$ rpm 30,000 20,000 14,00 Torque measuring system  Linearity deviation including hysteresis relating to the rated output (nominal)  Relative standard deviation of repeatability, as per DIN 1319 relating to the variation of the output signal	
Maximum speed $n_{max}$ rpm 30,000 20,000 14,00 Torque measuring system  Linearity deviation including hysteresis relating to the rated output (nominal)  Relative standard deviation of repeatability, as per DIN 1319 relating to the variation of the output signal	
Torque measuring system  Linearity deviation including hysteresis relating to the rated output (nominal)  Relative standard deviation of repeatability, as per DIN 1319 relating to the variation of the output signal  ≤ ±0.05	
Linearity deviation including hysteresis relating to the rated output (nominal)  Relative standard deviation of repeatability, as per DIN 1319 relating to the variation of the output signal $\%$ $\le \pm 0.05$	
relating to the rated output (nominal)  **Relative standard deviation of repeatability, as per DIN 1319 relating to the variation of the output signal  **Signal**  **Signal*	
as per DIN 1319 relating to the variation of the output sig- nal ≤ ±0.05	
Temperature effect per 10 K in the nominal (rated) tem-	
perature range	
on the output signal, relating to the actual value of the signal spread	
Frequency output % ≤ ±0.1	
Voltage output % ≤ ±0.1	
on the zero signal relating to the rated output (nominal)	
Frequency output % ≤ ±0.1	
Voltage output % ≤ ±0.1	
Nominal (rated) sensitivity (nominal (rated) signal range between torque = zero and nominal (rated) torque)	
Frequency output 10 kHz	
Voltage output V 10	
Rated output tolerance (deviation of the actual output quantity at $M_{nom}$ from the nominal (rated) signal range) $\%$ $\leq \pm 0.1$	
nominal (rated) output signal	
Frequency output (RS422, 5V symmetrical)	
with positive nominal (rated) torque kHz 15	
with negative nominal (rated) torque kHz 5	
Voltage output	
with positive nominal (rated) torque V +10	
with negative nominal (rated) torque V -10	
Output signal at torque = zero	
Frequency output KHz 10	
Voltage output         V         0           Calibration signal         %vC         50	
Load resistance       Frequency output (differential)       Ω       ≥100	
Voltage output kΩ ≥100	
Long-term drift over 48 h at reference temperature	
Frequency output % <005	
Voltage output % <0.5	
Measurement frequency range, -3 db kHz 1	
Residual ripple (voltage output) mV <sub>SS</sub> <100	
Group delay ms <1	
Maximum modulation range	
Frequency output kHz 4.4 15.6 (switch-on process: approx. 0)	
Voltage output V -11.2 +11.2 (switch-on process: approx14.2 +11.2 (switch-on process)	<b>!</b> )
Resolution	· <u> </u>
Frequency output Hz 0.5 at 10 kHz	
Voltage output mV 0.5	

Туре	T210									
Nominal (rated) torque M <sub>nom</sub>	Nm	0.5	1	2	5	10	20	50	100	200
Energy supply Nominal (rated) supply voltage (safety extra low voltage (SELV))	V DC	1030								
Calibration signal triggering	V	3 30								
Current consumption in measuring mode	Α				<0	.2 (at U				
Nominal (rated) power consumption	W	<2.5 (in the range of the nominal (rated) supply voltage					ltage)			
Permissible residual ripple of supply voltage	$mV_{SS}$	400								
Measurement system for rotational speed/angle of rotation	n									
Measurement system						Optica				
Pulses per revolution	n					512				
Output signal	V	5 (asymmetrical), two square wave signals, shifted by approx. 90°					ed by			
Minimum rotational speed for sufficient pulse stability	rpm					0				
Load resistance	Ω					>200	)			
Group delay	μs					1.5				
General information	_	ı								
EMC immunity to interference (as per EN 61326-1, Table A.1)										
Electromagnetic field	V/m	10								
Magnetic field	A/m	100								
Electrostatic discharge (ESD)	. ,									
Contact discharge	kV	4								
Air discharge	kV	4								
Fast transients (burst)	kV	1								
Emission (as per EN 61326-1, Table 3)										
RFI voltage		Class B								
RFI power		Class B								
RFI field strength		Class B								
Degree of protection as per EN 60529						IP40				
Weight, approx.	kg		0.2			0.6			1.3	
Nominal (rated) temperature range	°C					+10+				
Operating temperature range	°C					-20+8				
Storage temperature range	°C					-40+8	35			
Mechanical shock resistance according to EN 60068-2-27										
Number	n	1,000								
Duration	ms	3								
Acceleration (half sine)	m/s <sup>2</sup>	650								
Vibration testing per EN 60068-2-6										
Frequency range	Hz					102,0	00			
Duration	h	1.5								
Acceleration	m/s <sup>2</sup>					50				

Туре		T210								
Nominal (rated) torque M <sub>nom</sub>	Nm	0.5	1	2	5	10	20	50	100	200
Load limits 1)			•				•	•		
Limit torque, relating to M <sub>nom</sub>	%	200								
Breaking torque, relating to M <sub>nom</sub>	%	≥300								
Axial limit force	N	200	350	500	1,100	1,750	2,500	5,000	7,000	9,500
Lateral limit force <sup>2)</sup>	N	4	6	10	15	30	50	100	150	250
Oscillation width as per DIN 50100 (peak-to-peak) <sup>3)</sup>	%				'	80		•		'
Mechanical values										
Torsional stiffness c <sub>T</sub>	Nm/rad	46	89	133	585	1,367	2,933	10,893	24,043	50,388
Torsion angle at M <sub>nom</sub>	۰	0.62	0.64	0.86	0.49	0.42	0.39	0.26	0.24	0.23
Max. permissible vibration displacement of the rotor (peak-to-peak) <sup>4)</sup> Undulations in the connection geometry, based on ISO 7919-3	μm	$s_{max} = \frac{4500}{\sqrt{n}} \text{ (n in min}^{-1}\text{)}$								
<b>Effective velocity</b> in the vicinity of the housing, as per VDI 2056		$v_{eff} = \frac{\sqrt{n}}{3} (n \text{ in min}^{-1})$								
Mass moment of inertia of the rotor (around the rotational axis)	G*cm <sup>2</sup>	9.5	9.5	9.5	130	135	140	910	920	930
Balance quality level as per DIN ISO 1940		G6.3								

<sup>1)</sup> Each type of irregular stress (lateral or longitudinal force, exceeding nominal (rated) torque) can only be permitted up to its specified static load limit and provided none of the others can occur at the same time. If this condition is not met, the limit values must be reduced. If 50% of the lateral limit force occurs, only 50% of the axial limit force is permissible and the nominal (rated) torque must not be exceeded. In the measurement result, the permissible irregular stresses can have an effect of approx. 1% of the nominal (rated) torque. The specified loads only apply to the measurement shaft and must not be routed or stabilized via the housing.


B05813 01 E00 00 08.03.2022 4

<sup>2)</sup> Measured on the center of the shaft stub.

<sup>3)</sup> The nominal (rated) torque must not be exceeded.


<sup>4)</sup> The influence on the vibration measurements caused by radial run-out deviations, eccentricity, defects of form, notches, marks, local residual magnetism, structural inhomogeneity or material anomalies must be taken into account and isolated from the actual undulation.

BG1 - 0.5 Nm, 1 Nm·, 2 Nm

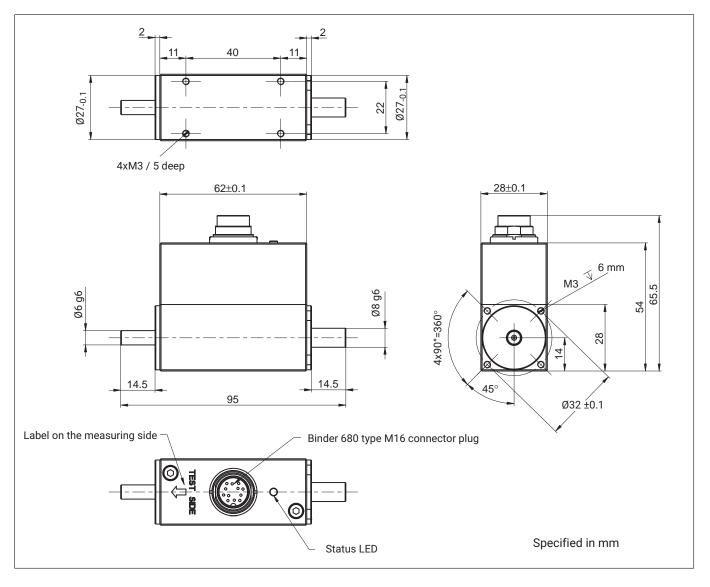


B05813 01 E00 00 08.03.2022 5

# BG2 – 5 Nm, 10 Nm, 20 Nm

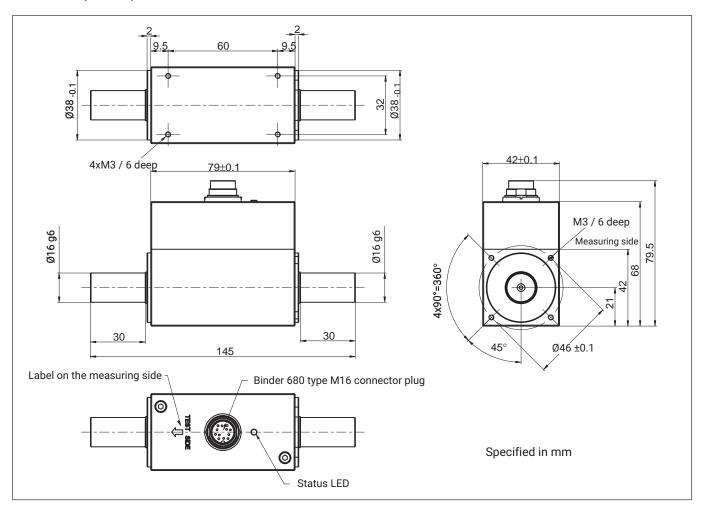

B05813 01 E00 00 08.03.2022 6

# BG3 - 50 Nm, 100 Nm, 200 Nm

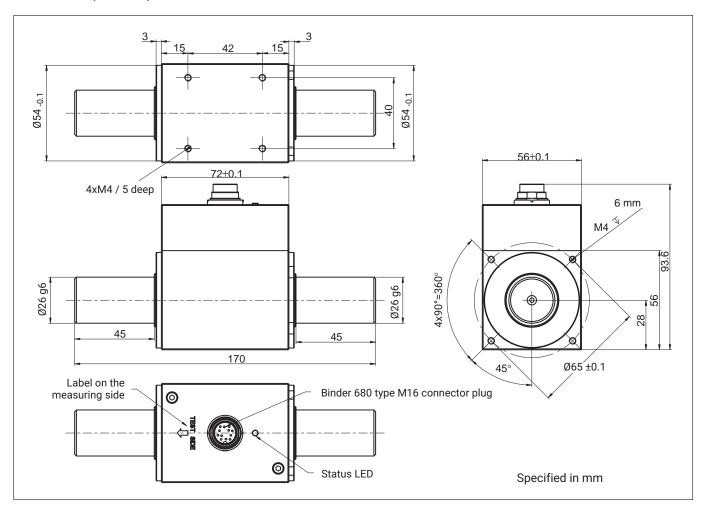

## **ORDERING NUMBERS**

The following versions are available as standard products at short notice from the warehouse:

Material no.	Nominal (rated) torque (Nm)
1-T210/0.5NM	0.5
1-T210/1NM	1
1-T210/2NM	2
1-T210/5NM	5
1-T210/10NM	10
1-T210/20NM	20
1-T210/50NM	50
1-T210/100NM	100
1-T210/200NM	200

#### **SCOPE OF SUPPLY**

- T210 torque transducer
- · Test report
- Mounting instructions

#### **ACCESSORIES**

To be purchased separately.

- Transducer connection cable, 5 m long, order no. 3-3301.0158
- Transducer connection cable, 10 m long, order no. 3-3301.0159
- Cable socket, 12-pin (binder), order no. 3-3312.0268
- Junction box, order no. 1-VK20A
- Bellows couplings, e.g. 1-4413.00xx

## **ACCESSORIES FOR JUNCTION BOX VK20A**

To be purchased separately.

- Connection cable, 1.5 m long (D-Sub, 15-pin free ends), order no. 1-KAB151A-1.5
- Connection cable, 1.5 m long (SUBCON5 free ends), order no. 1-KAB152-1.5

托驰 (上海) 工业传感器有限公司 上海市嘉定区华江路348号1号楼707室

Tel. 021-51069888 Fax. 021-51069009 www.yanatoo.ccom zhang@yanatoo.com